



Crimped wire mesh

Opening size: from 5mm to 20mm
Weaving type: I-V type
Steel grade (Material): AISI 304


Model I

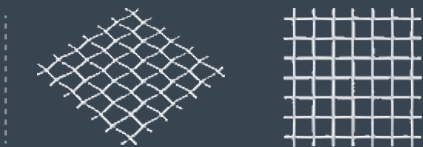

Model III

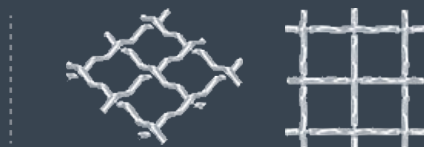

Model V

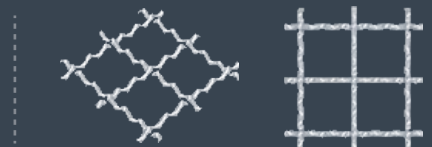

Main application:

For screening, fencing, shielding, reinforcement; for thermal insulation of industrial equipment used in aggressive environments and conditions of increased atmospheric and intergranular corrosion, part of equipment operated in an environment of high and low temperatures; gas filtration; air cleaning; screening and separation of bulk materials by fractions (particle sizes), separation, control of the geometric dimensions of particles and other purposes.

Crimped wire mesh

stainless steel

	Aperture mm	Wire diameter mm	Theoretical net weight of 1 sq.m kg	Open area %
5x1	5	1	2,21	69
5x1,8	5	1,8	6,32	54
5x2	5	2	7,58	51
6x1,2	6	1,2	2,65	69
6x2	6	2	6,63	56
7x0,7	7	0,7	0,84	83
7x1,2	7	1,2	2,33	73
8x1	8	1	1,47	79
8x1,2	8	1,2	2,08	76
8x1,5	8	1,5	3,14	71
8x1,6	8	1,6	3,54	69
8x2	8	2	5,3	64
10x1	10	1	1,21	83
10x1,6	10	1,6	2,93	74
10x1,8	10	1,8	3,64	72
10x2	10	2	4,42	69
10x2,5	10	2,5	6,63	64
10x3	10	3	9,18	59
12x1,2	12	1,2	1,45	83
12x1,6	12	1,6	2,5	78
12x2	12	2	3,79	73
14x1,6	14	1,6	2,18	81
14x2	14	2	3,32	77
15x2	15	2	3,12	78
15x2,5	15	2,5	4,74	73
16x1,6	16	1,6	1,93	83
18x1,6	18	1,6	1,73	84
20x1,6	20	1,6	1,57	86
20x2	20	2	2,41	83
20x2,5	20	2,5	3,68	79
20x3	20	3	5,09	76

Crimped wire mesh is available in rolls, and it is possible to unwind the required quantity from a roll.